


Dim-Out Blind Systems



Motorised Dim-Out Blind System

Silent Gliss® 4760 Small

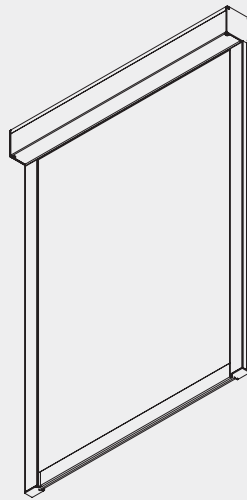


Product Information

- Technically advanced motorised dim-out blind system.
- For applications up to 1.6m wide, 1.6m high or 2.5m² with a maximum weight of 2kg.
- Easy click-in side profiles.
- Fabrics are 'zipped' into the side profiles.
- Inside or outside recess fitting.
- Supplied powder coated in black or white.
- Delivered ready-assembled, made-to-measure.
- Suitable for inclined positions up to 15° from vertical.
- Applicable with Radio Remote Control Systems and Silent Gliss Move app.




4760

Profile and Bending Information



10994-5




10532



How To Measure

Inside fitting

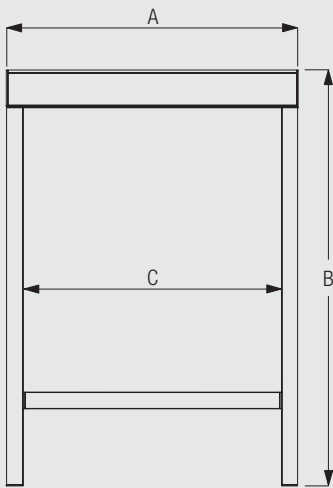


A: System width
B: System drop
C: Fabric width



4760

Face fitting

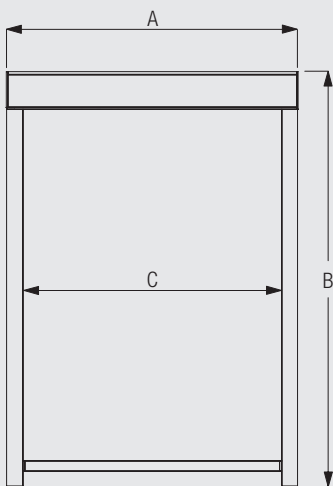

A: System width
B: System drop
C: Fabric width

System Dimensions



1.6m



65cm



1.6m




2.5m²



2kg

System Options

Radio Remote Control System Silent Gliss 9940




The Silent Gliss motors 10423 and 10523 feature an integrated radio receiver. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers maximum comfort with minimum wiring.

The Silent Gliss motors 10422 and 10522 can be used with Radio Control System 0450 but will use an external radio receiver.

For further details, please refer to catalogue section "Motors & Controls".

Silent Gliss Move App

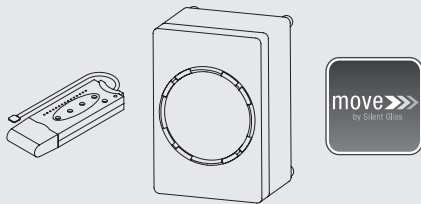

Operation of system with Silent Gliss Move app using a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, the Move Server Set Silent Gliss 9960 is required.


For further details, please refer to product group "Motors & Controls".



4760

Fitting Information


Positioning of drill holes

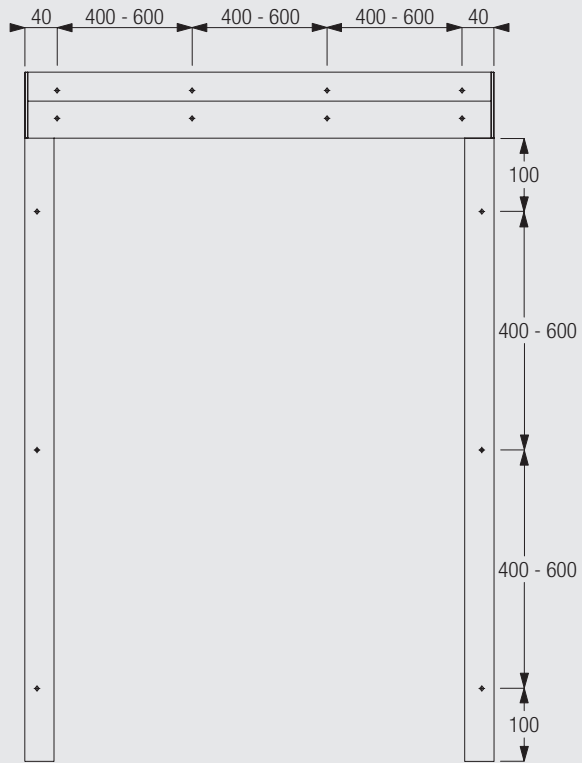

Side profiles 11001 and 11002




4760

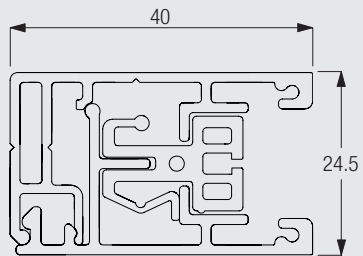


Drawing includes zip profile.

Fitting Options


Ceiling fix with direct mounting

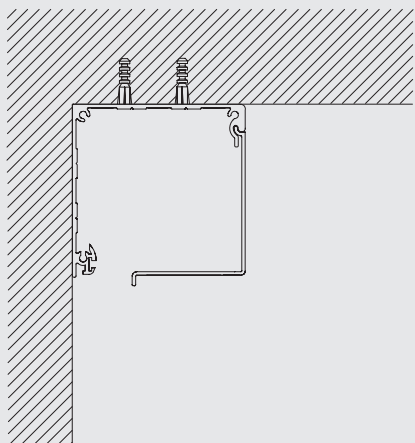

Wall fix with direct mounting

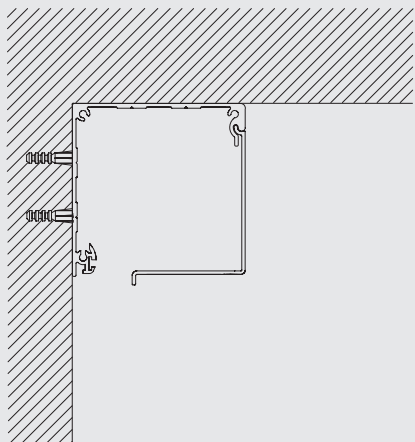

Recess fix with direct mounting

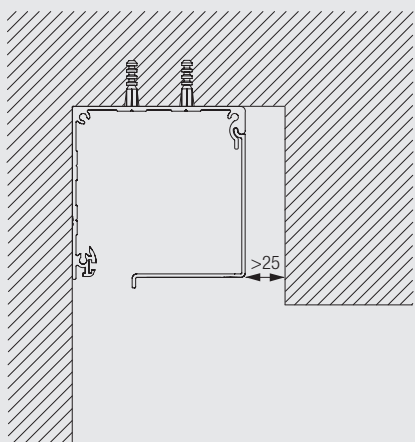

4760











Standard Accessories

10284 O-Ring






10522 Motor 20-Series, 230V



10532	Profile		10961	Zip profile	
10993	Bottom weight		11001	Side guide case	
11002	Side guide cover		11013	Clip for motor	
11024	Zip guide		11026	Cover left for side guide	
11027	Cover right for side guide		11028	Bottom weight guide left	
11029	Bottom weight guide right		11030	Bottom weight cover	
10994-5	Box case and cover, 73 mm				



Optional Accessories

10422	Motor 20-Series, 120 V		10423	Motor 20-Series, 120 V, radio receiver	
10523	Motor 20-Series, 230V, radio receiver				

Useful Measures




4760

10993	Bottom weight		11004	Side cover left for box, 73 mm	
-------	---------------	---	-------	--------------------------------	---


Motor & Controls

Motor Silent Gliss 10522 / 10523 (230 V)

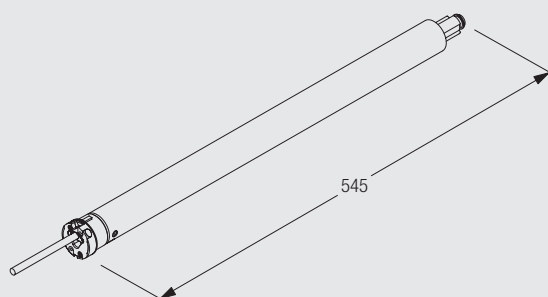

- Voltage: 230 V AC
- Frequency of receiver of motor 10523: 868 / 915 MHz
- Torque: 3 Nm
- Speed: 30 rpm
- Frequency: 50 Hz
- Power: 135 W
- Current: 0.60 A
- Thermal Overload Protection
- CE Standard
- Cable pluggable
- Max. Weight Capacity: 7.5 kg

Motor Silent Gliss 10422 / 10423 (120 V)

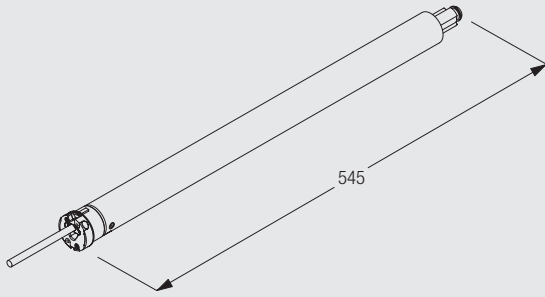


- Voltage: 120 V AC
- Frequency of receiver of motor 10423: 868 / 915 MHz
- Torque: 3 Nm
- Speed: 36 rpm
- Frequency: 60 Hz
- Power: 138 W
- Current: 1.15 A
- Thermal overload Protection
- CE Standard
- Cable pluggable
- Max. Weight Capacity: 7.5 kg

Operation Methods

Wall Switch

System to be operated by fixed wall switch.

Radio Remote Control System Silent Gliss 9940




The Silent Gliss motors 10523 and 10423 feature an integrated radio receiver. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers ease of operation with minimum wiring.

The Silent Gliss motors 10422 and 10522 can be used with Radio Control System 0450 but will use an external radio receiver.

For further details, please refer to catalogue section "Motors & Controls".

Silent Gliss Move App

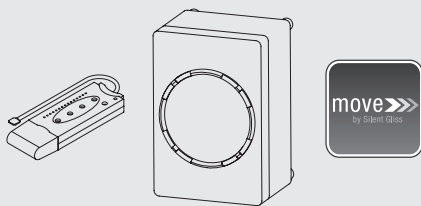

Operation of system with Silent Gliss Move app using a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, the Move Server Set Silent Gliss 9960 is required.

For further details, please refer to product group "Motors & Controls".




4760

Wiring and Connections

For other operating / wiring methods, please see section "Motors & Controls".

Motorised Dim-Out Blind System

Silent Gliss® 4770 Medium

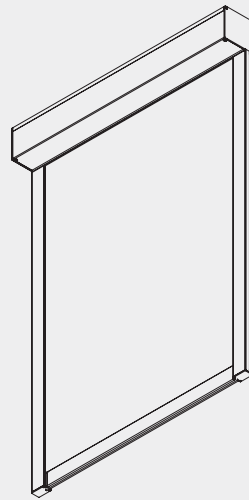


Product Information

- Technically advanced motorised dim-out blind system.
- Up to 2.2m wide, 2.4m high or 5.3 m² with a maximum weight 3.7kg.
- Easy click-in side profiles.
- Inside or outside recess fitting.
- Supplied powder coated black or white.
- Fabrics are 'zipped' into the side profiles.
- Delivered ready-assembled made-to-measure.
- Suitable for inclined positions up to 15° from vertical.
- Applicable with Radio Remote Control Systems and Silent Gliss Move app.




4770

Profile and Bending Information



10996-7




11037



How To Measure

Inside fitting

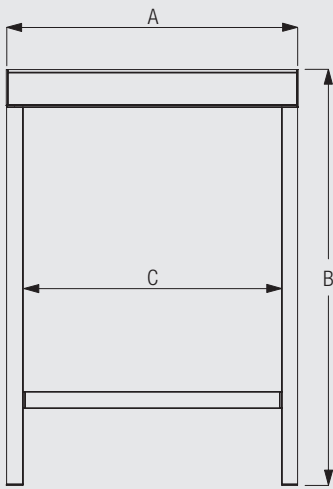


A: System width
B: System drop
C: Fabric width



4770

Face fitting

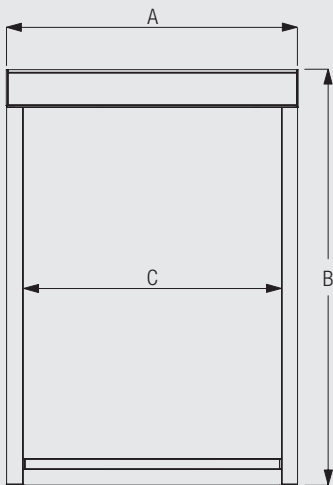

A: System width
B: System drop
C: Fabric width

System Dimensions



2.2m



65cm



2.4m



5.3m²




3.7kg

Please note: The max. system width/drop also depends on the fabric type.

System Options

Radio Remote Control System Silent Gliss 9940




The Silent Gliss motors 10423 and 10523 feature an integrated radio receiver. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers maximum comfort with minimum wiring.

The Silent Gliss motors 10422 and 10522 can be used with Radio Control System 0450 but will use an external radio receiver.

For further details, please refer to catalogue section "Motors & Controls".

Silent Gliss Move App

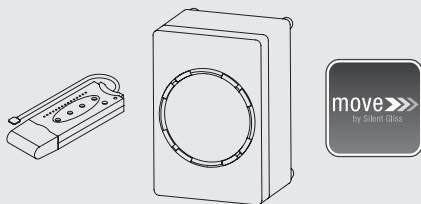

Operation of system with Silent Gliss Move app using a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, the Move Server Set Silent Gliss 9960 is required.


For further details, please refer to product group "Motors & Controls".



4770

Fitting Information


Positioning of drill holes

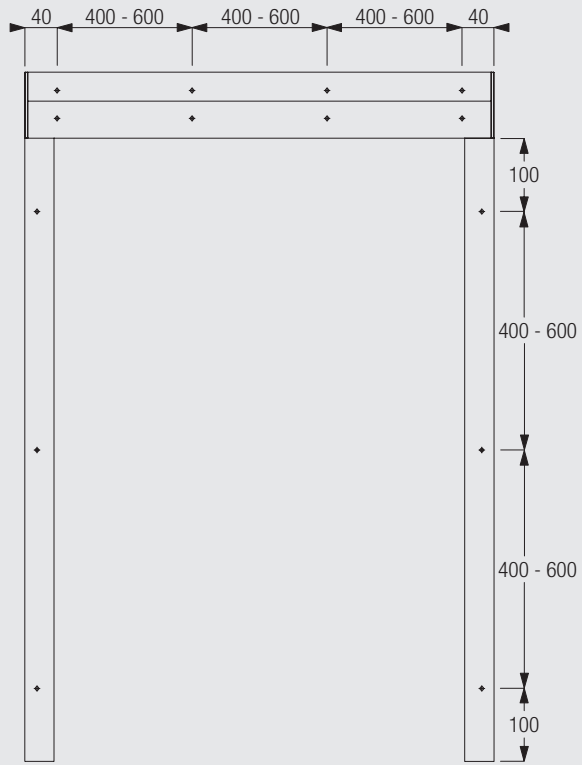

Side profiles 11001 and 11002




4770

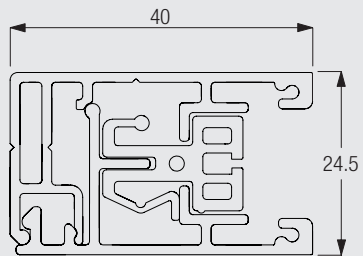


Drawing includes zip profile.

Fitting Options


Ceiling fitting with direct mounting

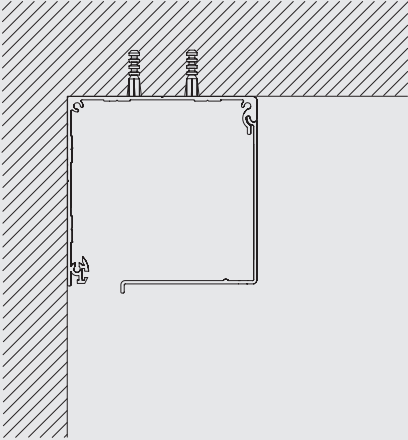

Wall fitting with direct mounting

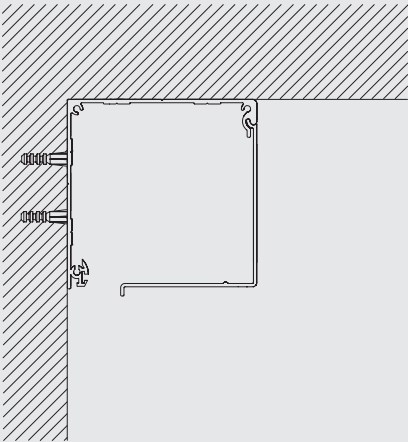

Recess fitting with direct mounting

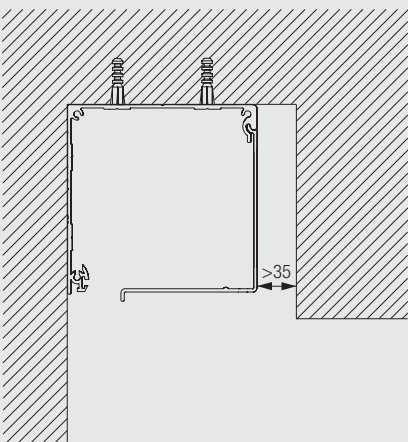

4770














Standard Accessories

10522 Motor 20-Series, 230V






10961 Zip profile



10993	Bottom weight		11001	Side guide case	
11002	Side guide cover		11011	Clip for support	
11013	Clip for motor		11024	Zip guide	
11026	Cover left for side guide		11027	Cover right for side guide	
11028	Bottom weight guide left		11029	Bottom weight guide right	
11030	Bottom weight cover		11037	Profile tube, 60 mm	
10996-7	Box case and cover, 90 mm				



Optional Accessories

10422	Motor 20-Series, 120 V		10423	Motor 20-Series, 120 V, radio receiver	
10523	Motor 20-Series, 230V, radio receiver				




4770

Useful Measures

10993	Bottom weight		11006	Side cover left for box, 90 mm	
-------	---------------	---	-------	--------------------------------	---


Motor & Controls

Motor Silent Gliss 10522 / 10523 (230 V)

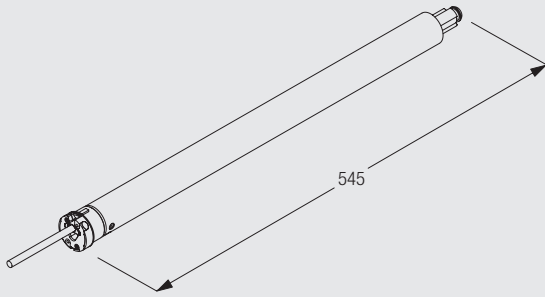

- Voltage: 230 V AC
- Frequency of receiver of motor 10523: 868 / 915 MHz
- Torque: 3 Nm
- Speed: 30 rpm
- Frequency: 50 Hz
- Power: 135 W
- Current: 0.60 A
- Thermal Overload Protection
- CE Standard
- Cable pluggable
- Max. Weight Capacity: 7.5 kg

Motor Silent Gliss 10422 / 10423 (120 V)

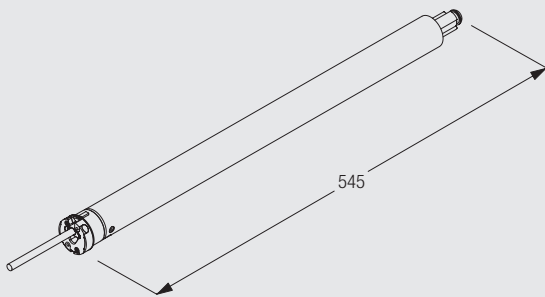


- Voltage: 120 V AC
- Frequency of receiver of motor 10423: 868 / 915 MHz
- Torque: 3 Nm
- Speed: 36 rpm
- Frequency: 60 Hz
- Power: 138 W
- Current: 1.15 A
- Thermal overload Protection
- CE Standard
- Cable pluggable
- Max. Weight Capacity: 7.5 kg

Operation Methods

Wall Switch

System to be operated by fixed wall switch.

Radio Remote Control System Silent Gliss 9940



The Silent Gliss motors 10523 and 10423 feature an integrated radio receiver. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers ease of operation with minimum wiring.


The Silent Gliss motors 10422 and 10522 can be used with Radio Control System 0450 but will use an external radio receiver.

For further details, please refer to catalogue section "Motors & Controls".



4770

Silent Gliss Move App

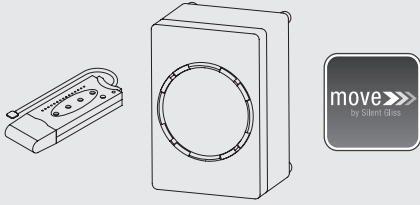

Operation of system with Silent Gliss Move app using a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, the Move Server Set Silent Gliss 9960 is required.

For further details, please refer to product group "Motors & Controls".

Wiring and Connections


For other operating / wiring methods, please see section "Motors & Controls".



4770

Motorised Dim-Out Blind System

Silent Gliss® 4780 Large

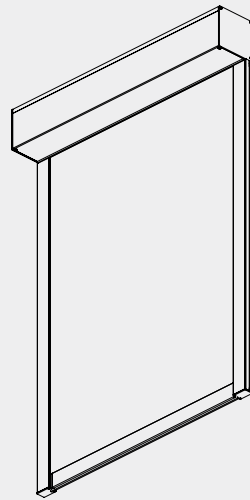



Product Information

- Technically advanced motorised dim-out blind system.
- Up to 3m wide, 3m high or 9m² with a maximum weight of 6kg.
- Easy click-in side profiles.
- Inside or outside recess fitting.
- Supplied powder coated black or white.
- Fabrics are 'zipped' into the side profiles.
- Delivered ready-assembled made-to-measure.
- Suitable for inclined positions up to 15° from vertical.
- Applicable with Radio Remote Control System Silent Gliss 9940 and Silent Gliss Move app.




4780

Profile and Bending Information

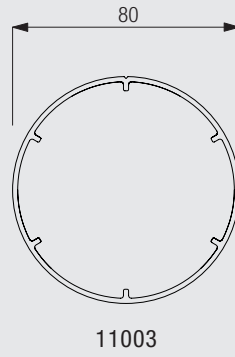

How To Measure

Inside fitting

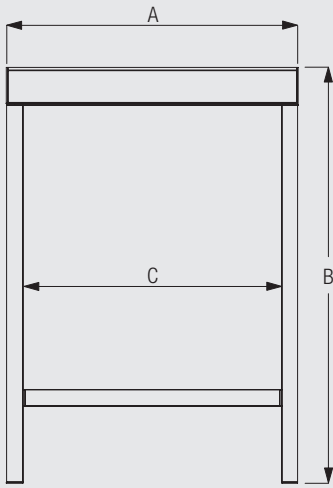


A: System width
B: System drop
C: Fabric width



4780

Face fitting

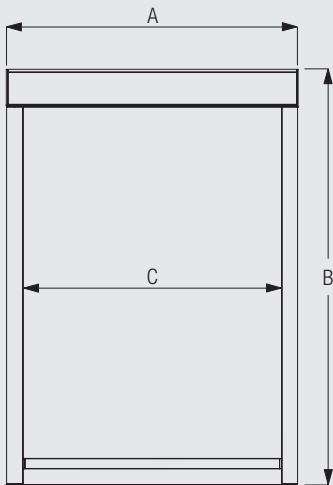

A: System width
B: System drop
C: Fabric width

System Dimensions



3m



65cm



3m



9m²




6kg

Please note: The max. system width/drop also depends on the fabric type.

System Options

Radio Remote Control System Silent Gliss 9940




The Silent Gliss motors 10423 and 10523 feature an integrated radio receiver. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers maximum comfort with minimum wiring.

The Silent Gliss motors 10422 and 10522 can be used with Radio Control System 0450 but will use an external radio receiver.

For further details, please refer to catalogue section "Motors & Controls".

Silent Gliss Move App

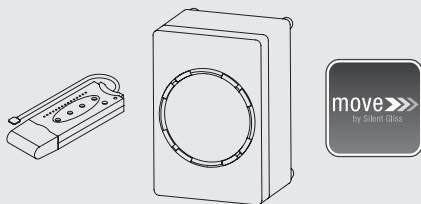

Operation of system with Silent Gliss Move app using a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, the Move Server Set Silent Gliss 9960 is required.


For further details, please refer to product group "Motors & Controls".



4780

Fitting Information


Positioning of drill holes

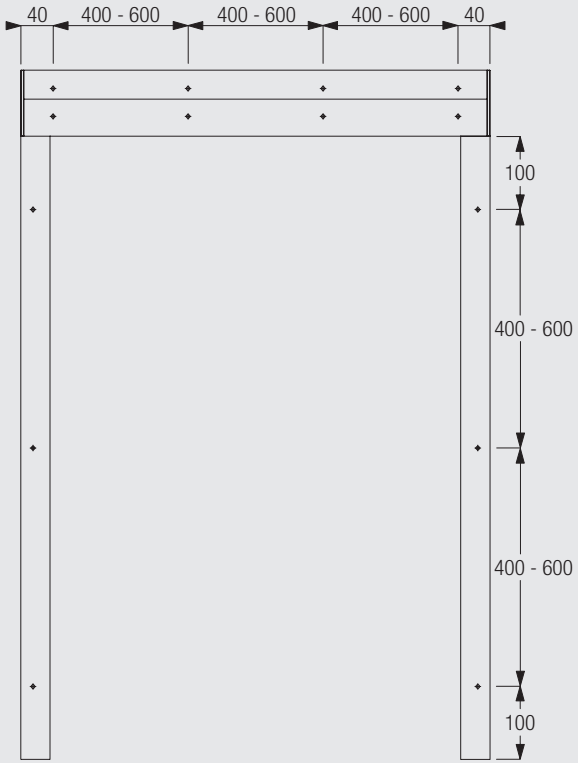

Side profiles 11001 and 11002




4780

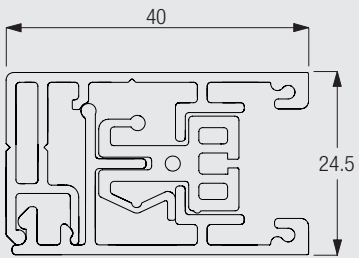


Drawing includes zip profile.

Fitting Options


Ceiling fitting with direct mounting

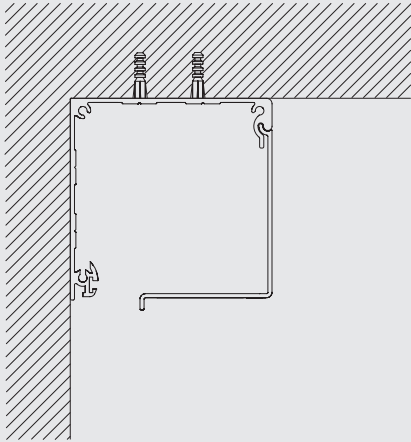

Wall fitting with direct mounting

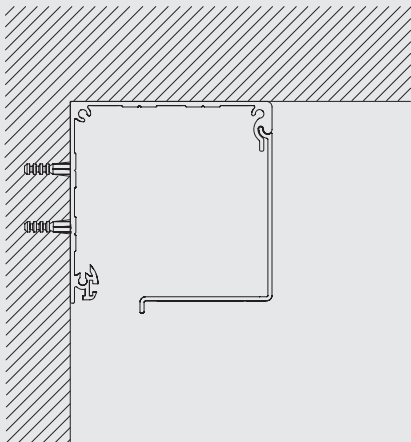

Recess fitting with direct mounting

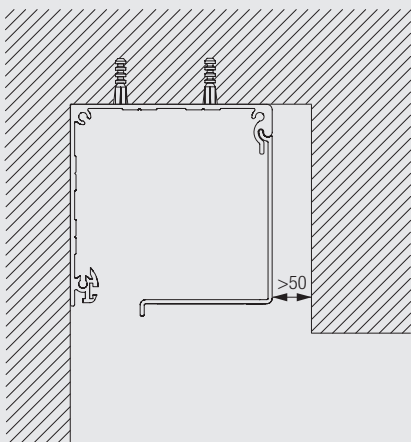


4780

Standard Accessories

10284 O-Ring



10422 Motor 20-Series, 120 V




10423	Motor 20-Series, 120 V, radio receiver		10522	Motor 20-Series, 230V	
10523	Motor 20-Series, 230V, radio receiver		10668	Strip (10mm)	
10961	Zip profile		10993	Bottom weight	
11001	Side guide case		11002	Side guide cover	
11003	Profile tube, 80 mm		11008	Side cover left for box, 110 mm	
11009	Side cover right for box, 110 mm		11011	Clip for support	
11013	Clip for motor		11020	Tube adapter support 80 mm	
11022	Tube adapter motor 80 mm		11023	Motor drive 80 mm	
11024	Zip guide		11025	Zip	
11026	Cover left for side guide		11027	Cover right for side guide	
11028	Bottom weight guide left		11029	Bottom weight guide right	
11030	Bottom weight cover		10998-9	Box case and cover, 110 mm	




4780

Useful Measures

10993 Bottom weight




11008 Side cover left for box, 110 mm




Motor & Controls

Motor Silent Gliss 10522 / 10523 (230 V)

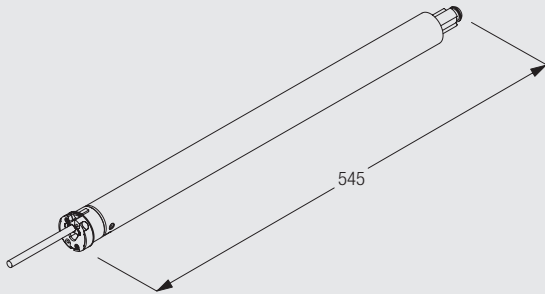

- Voltage: 230 V AC
- Frequency of receiver of motor 10523: 868 / 915 MHz
- Torque: 3Nm
- Speed: 30rpm
- Frequency: 50Hz
- Power: 135W
- Current: 0.60A
- Thermal Overload Protection
- CE Standard
- Cable pluggable
- Max. Weight Capacity: 7.5kg

Motor Silent Gliss 10422 / 10423 (120 V)

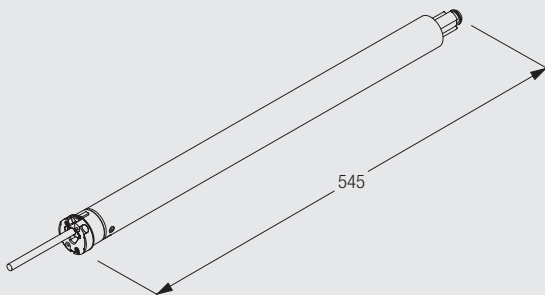


- Voltage: 120 V AC
- Frequency of receiver of motor 10423: 868 / 915 MHz
- Torque: 3Nm
- Speed: 36rpm
- Frequency: 60Hz
- Power: 138W
- Current: 1.15A
- Thermal overload Protection
- CE Standard
- Cable pluggable
- Max. Weight Capacity: 7.5kg

Operation Methods

Wall Switch

System to be operated by fixed wall switch.

Radio Remote Control System Silent Gliss 9940



The Silent Gliss motors 10523 and 10423 feature an integrated radio receiver. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers ease of operation with minimum wiring.


The Silent Gliss motors 10422 and 10522 can be used with Radio Control System 0450 but will use an external radio receiver.

For further details, please refer to catalogue section "Motors & Controls".



4780

Silent Gliss Move App

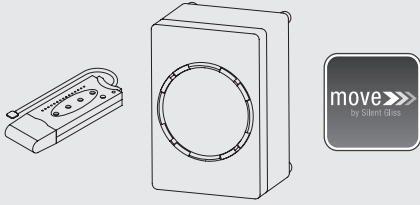

Operation of system with Silent Gliss Move app using a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, the Move Server Set Silent Gliss 9960 is required.

For further details, please refer to product group "Motors & Controls".

Wiring and Connections

For other operating / wiring methods, please see section "Motors & Controls".



4780