



DIM OUT

GUARDIAN®

ROLLER AND VERTICAL BLINDS

A popular, textured plain, flame retardant fabric in 12 colourways.

Guardian® features Ultra-Fresh* and is a Greenshield fabric.

Composition: 100% Polyester

Fabric Width: 2.00m (78")

Louvre Width: 89mm (3½") or 127mm (5")

Weight: 293g/m² (8.6oz/yd²)



LOUVOLITE

GUARDIAN®

SOLAR, OPTICAL AND COLOUR FASTNESS PROPERTIES

	SOLAR			OPTICAL			UV block	SC	CF	DIM out	G VALUE				G TOT
	T _s	R _s	A _s	T _o	R _o	A _o					SG	DG	TG	DG LE	
Calico	14	76	10	12	84	4	100	0.27	5	3	0.29	0.32	0.32	0.32	0.16
Charcoal	7	39	54	0	14	86	100	0.62	5+	3	0.49	0.50	0.42	0.44	0.21
Cream	16	69	15	13	74	13	100	0.33	5+	3	0.33	0.35	0.34	0.35	0.20
Flint	9	60	31	2	52	46	100	0.42	5+	3	0.37	0.40	0.36	0.37	0.17
Indigo	7	43	50	0	18	82	100	0.58	5	3	0.47	0.48	0.41	0.43	0.20
Jet Black	5	32	63	0	6	94	100	0.69	5+	3	0.53	0.53	0.44	0.46	0.21
Khaki	9	54	37	1	45	54	95	0.48	5	3	0.40	0.42	0.38	0.39	0.18
Parchment	11	60	29	3	50	47	100	0.42	5+	3	0.38	0.39	0.36	0.38	0.18
Silver	11	68	21	5	67	28	97	0.34	5	3	0.33	0.35	0.34	0.35	0.17
Smoke Blue	8	63	29	1	55	44	97	0.39	5	3	0.36	0.38	0.36	0.36	0.16
Taupe	9	59	32	2	50	48	96	0.43	5	3	0.38	0.40	0.37	0.38	0.17
White	17	75	8	16	83	1	100	0.28	5+	2	0.30	0.32	0.32	0.33	0.19

T: % Transmittance
R: % Reflectance
A: % Absorption

UV Block: the % of UV light blocked by the fabric
SC: Shading Co-efficient
CF: Colour Fastness

Dim out:
1 = High light penetration
4 = Low light penetration
5 = Blockout

G Value: amount of heat transmitted through the glazing
SG: Single Glazed


DG: Double Glazed
TG: Triple Glazed
DG LE: Double Glazed Low Emissivity.

GTOT: The amount of heat transmitted through the combination of glass and solar shading.

SOLAR GAIN: The amount of heat increase resulting from solar energy entering a room. It is the total of three separate parts - the amount of energy transmitted directly into the room, the energy which is absorbed by the blind and the proportion of energy which is absorbed by the window.

SHADING CO-EFFICIENT: The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric. The test results in the table above have been achieved using a single 6mm glass glazing system.

G TOT: When the G-value (a measure of total solar energy that passes through the glazing system and the blind fabric) is combined with the value of the shading.

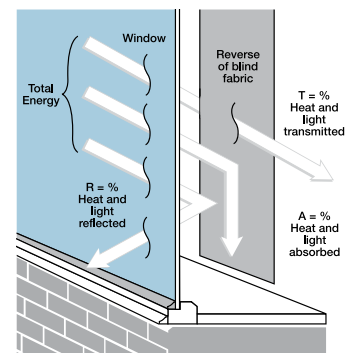

Your Louvolite® Performance Fabrics Distributor:



Manufactured in the UK

CI/SfB 1976 reference by SfB Agency

(76.7) X

GUARDIAN®

Fabric Composition

100% polyester

Fabric Width

2.00m (78")

Vertical Louvre Width

89mm (3½") or 127mm (5")
Other widths available on request

Fabric Weight

293g/m² (8.6oz/yd²)

Flammability Standards

Guardian® meets FR standard BS 5867 Part 2 Type B. Further information is available on request.

Colour Fastness

Tested in accordance with BS EN ISO 105-B01:1999

Cleaning

Guardian® vertical fabrics are machine washable, other Guardian® fabrics can be wiped clean. See manufacturers instructions. Tested in accordance with BS EN 26330:1994 method 7a.

Ultra-Fresh*

A fabric treated with Ultra-Fresh* protects against the growth of odour causing bacteria and fungi, preserving fabric freshness.

*Ultra-fresh is a registered trademark of Thomson Research Associates, Canada.

Greenshield

Fabrics featuring Greenshield have been tested to confirm no harmful VOC's or hazardous substances will be released into the environment in quantities that are recognised as potentially dangerous to occupants of dwellings or buildings.

Properties



White




Calico



Cream



Silver



Parchment




Taupe



Flint



Khaki



Smoke Blue



Charcoal



Jet Black



Indigo

